



NATIONAL AUTOMOTIVE TESTING AND R&D INFRASTRUCTURE PROJECT

(A Registered Society under Ministry of Heavy Industry and Public Enterprises)

Ref. No. NATRIP/GARC/2019/Test Track/Water Wade Track-RCC/784

Date: 11th May 2020

NOTICE INVITING TENDER (NIT)

Subject: Construction of Water Wading Teat Track for Vehicle Testing at NATRIP – Global Automotive Research Centre (GARC), Plot E1, SIPCOT Industrial Growth Centre, Oragadam, Mathur Post, Sriperumputhur Taluk, Kanchipuram Dist – 602 105.

Dear Sir,


National Automotive Testing and Research & Development Infrastructure Project (NATRIP) Implementation Society under Government of India, Ministry of Heavy Industries & Public Enterprises invites quotations from registered and authorized firms for **“Construction of Water Wading Teat Track for Vehicle Testing”** at ‘Global Automotive Research Centre (GARC) at Plot E-1, Oragadam Industrial Growth Centre Oragadam, Mathur Post, Sriperumbadur, and Taluk Kanchipuram District-602105.

2. The sealed bids titled “Quotation “With ref no of the document addressed to the **“Procurement Officer” Global Automotive Research Centre (GARC), Plot E1, SIPCOT Industrial Growth Centre, Oragadam, Mathur Post, Kanchipuram Dist-601 105, Tamil Nadu, INDIA”** shall reach by 01st June 2020 @ 3.00 pm.

3. BOQ & Detailed Requirements as per annexure 1

4. Terms & Conditions:

1. The rates shall include all costs against mobilization and demobilization of your equipment and professional personnel, unskilled labors, necessary arrangement like site clearing, lights, power supply etc., GARC will not arrange any security for your equipment.
2. The offer shall include any other activity related to the scope of the work as in title above needed for the project but not explicitly mentioned above.
3. It shall be the responsibility of the successful bidder to complete the job as per the technical specifications stated herein in at Global Automotive Research Centre (GARC).
4. The rates quoted by the bidder shall remain firm till the completion of the job/work order and price variation shall not be entertained.
5. The prices should be quoted must be free from any kind of overwriting, alteration and correction.
6. Taxes/GST, if any should be mentioned separately.
7. The agency shall carryout the work within 45 days (Forty Five days) against the acceptance of the work/purchase order
8. Prospective bidders may visit the premises to ascertain the scope of works involved, before submitting their quotation.
9. It shall be ensured by your agency that all your equipment is handled carefully while doing works without causing any damage to GARC premises.



NATIONAL AUTOMOTIVE TESTING AND R&D INFRASTRUCTURE PROJECT

(A Registered Society under Ministry of Heavy Industry and Public Enterprises)

Ref. No. NATRIP/GARC/2019/Test Track/Water Wade Track-RCC/784 Date: 11th May 2020

10. Retention amount 5% will deducted from the final bill value. The same amount will be refunded 6 months after completion of the work (i.e., on submission of the final bill).
11. The contractor shall visit and examine the Site of Works and its surroundings, with prior notice to NATIS, at his/their cost and obtain for himself / themselves on his/their own responsibility, all information that may be necessary for preparing the Quotation and entering into a Contract. The Bidder shall be deemed to have inspected the Site and its surroundings before hand and taken into account all relevant factors pertaining to the Site in the preparation and submission of the Quotation.
12. Cost of any damages shall be recovered from agency.
13. It shall be your agency's liability to avoid any causality during the work in all respects, any kind of causality to be borne by your agency.
14. It shall be your agency's liability to avoid any losses or damages by wrongful act; or negligence; or irresponsibility; or carelessness during the work.
15. The Competent Authority of this office reserves the rights to reject any or all the quotations without assigning any reason and the decision of the competent authority of this office shall be final and binding.

5. Terms of Payment:


1. 100% payment shall be release after supply of items/Works, as certified by engineer incharge of the lab.
2. Payment shall be released within 45 days from the date of submission of work completion report signed by engineer incharge of the lab.
3. At the time of payment of bills, the taxes liable to be deducted, if any, shall be deducted at source as per Government rules and guidelines as may be prevailing at the time of payment
4. All payments to the Vendor shall be made by Account payee cheque or RTGS in Indian Rupees
5. Liquefied Damages: In the event of delay on part of the supplier/contractor to achieve completion of the work within the time lines as specified in the quote, the supplier/contractor liable to pay to GARC a sum equal 0.5% of the contract price for every week of delay, or part thereof, subject to the maximum of 10% of the contract price, for such default as liquefied damages, which the supplier/contractor is not a penalty but a genuine pre-estimate of loss and damage likely to be suffered and incurred by GARC for every day, or part thereof, that such delay subsists till the date of actual completion. GARC may, without prejudice to any other method of recovery, deduct the amount of such damages from any monies due or to become due to the supplier/contractor.

GARC shall be at liberty to withhold any of the payments in full or in part subject to recovery of taxes including TDS as applicable



Rajeswar Tripathy
(Procurement Incharge)

BOQ for Construction of Water Wading Test Track for Vehicle Testing - GARC, Chennai


SR. NO.	DSR-2018	Description of the Items	Units	Total Qty	RATE	Amount
1	5.33.1	Providing and laying in position machine batched and machine mixed design mix M-25 grade cement concrete for reinforced cement concrete work, using cement content as per approved design mix, including pumping of concrete to site of laying, power trowel finishing with necessary slope but excluding the cost of centering, shuttering and reinforcement, including admixtures in recommended proportions as per IS: 9103 to accelerate, retard setting of concrete, improve workability without impairing strength and durability as per direction of Engineer-in-charge. (Note :- Cement content considered in this item is @ 330 kg/cum. Excess/ less cement used as per design mix is payable/recoverable separately). All works upto plinth level	Cum	132.00		
2	5.9.1	Centering and shuttering including strutting, propping etc. and removal of form for all heights-Foundations, footings, bases of columns, Wall etc. for mass concrete	Sqm	499.00		
3	5.22A.6	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete upto plinth level. Thermo-Mechanically Treated bars	Kg	5645.55		
					Sub Total	
					GST, if any	
					Total Amount	
Amount in words:						
Work Completion Period:						




100 MTR WATER WADE TEST TRACK. DETAILS.

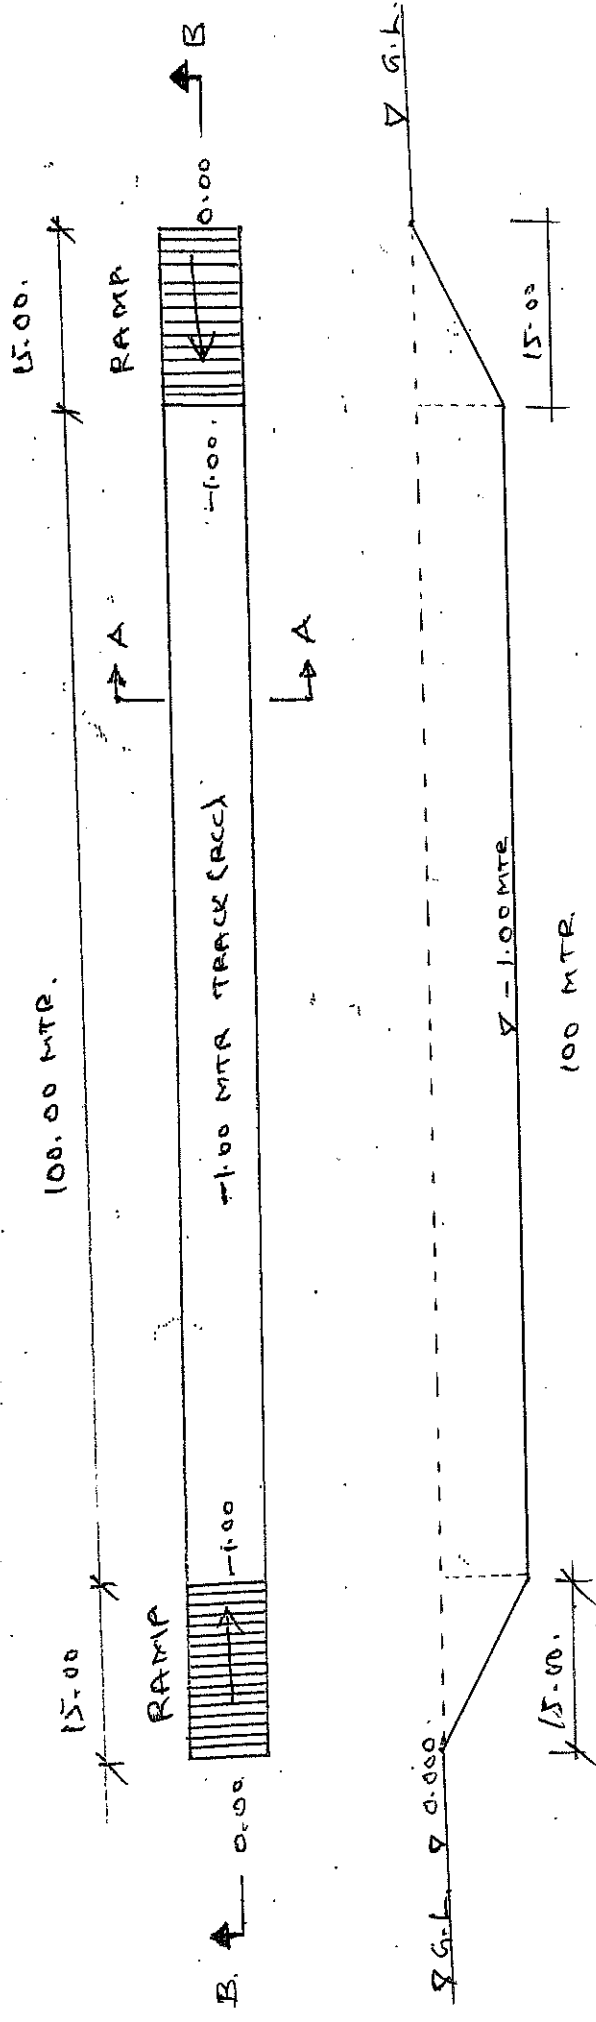

SECTION (B-B)

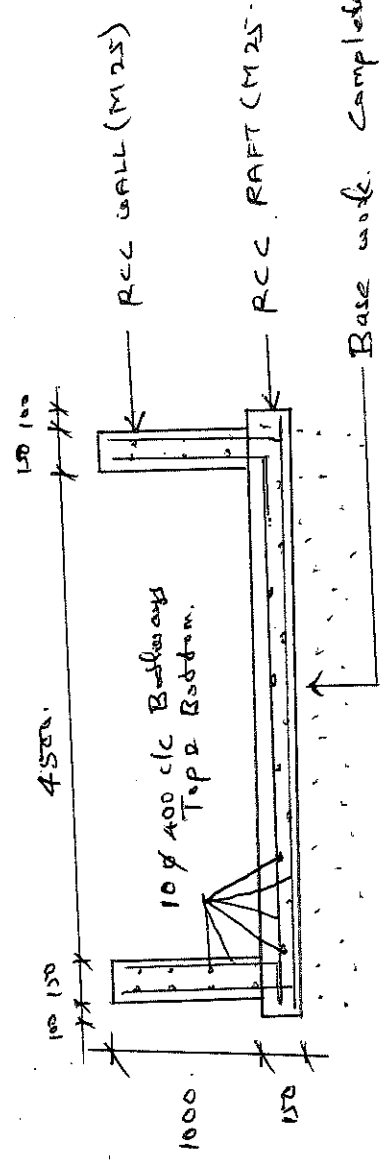

Base work completed by GARE.



03/10/19

SECTION (A-A)